

Névoa

CARPET TILE SPECIFICATIONS

CONSTRUCTION
PILE FIBER
TUFTING GAUGE
PILE HEIGHT
TOTAL CARPET WEIGHT
BACKING STRUCTURE
PILE TREATMENT
TILE SIZE

ECOSQUARE BACKING

Multi Level Texture Tufted
100% Solution Dyed Nylon
1/12 inch
3,0 - 5.5 mm.
4,077 gram/sq.m.
 EcoSquare® Reinforced Recycled Backing
Stain and Soil Protection
50 x 50 cm.

ECOSOFT BACKING

Multi Level Texture Tufted
100% Solution Dyed Nylon
1/12 inch
3,0 - 5.5 mm.
2,962 gram/sq.m.
 EcoSoft® Recycled Cushion Backing
Stain and Soil Protection
50 x 50 cm.

PERFORMANCE

END USE CLASSIFICATION
CASTER CHAIR INDEX
DIMENSIONAL STABILITY
ELECTROSTATIC PROPENSITY
COLORFASTNESS TO LIGHT

BS EN 1307 Class 33 – Heavy Commercial
BS EN 985 ≥ 2.4 Continuous use
BS EN 986 < 0,15%
AATCC 134 < 3 KV
ISO 105 B02 Min L6

BS EN 1307 Class 33 – Heavy Commercial
BS EN 985 ≥ 2,4 Continuous use
BS EN 986 < 0,15%
AATCC 134 < 3 KV
ISO 105 B02 Min L6

FLAMMABILITY

HOT METAL NUT
RADIANT PANEL TEST
SMOKE DENSITY
SURFACE FLAMMABILITY
FIRE CLASSIFICATION

BS 4790 Low Radius
ASTM E648 Class 1
ASTM E662 < 450
ASTM D 2859 Passes
-

BS 4790 Low Radius
ASTM E648 Class 1
ASTM E662 < 450
ASTM D 2859 Passes
BS EN 13501 Class B ₁ -s ₁

ACOUSTIC BEHAVIOUR

SOUND ABSORPTION


BS EN ISO 354 NRC 0,15 or higher

BS EN ISO 354 NRC 0,30 or higher (Superior Noise Reduction)
--

CERTIFICATION



INSTALLATION METHOD

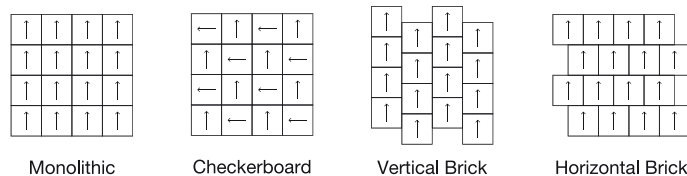

Specifications are subject to normal manufacturing tolerances, and subject to change without prior notice.

As in all quality carpets, colors are subject to dye lot variations.

Flow® MegaPlank®

Nevoa is also available in 2.00 m. wide moisture resistant ZeroFlow® Backing or as MegaPlank® EcoSoft backing, applicable for Healthcare, Wellbeing & Education facilities.



Headquarters

2054 New Petchburi Road
 Bangkapi, Huaykwang, Bangkok 10310 Thailand
 Tel +66 (0) 2314-5402, Fax +66 (0) 2318-3537
 www.carpetsinter.com, info@carpetsinter.com

