

Carpets Inter®


Architexture

CARPET TILE
COLLECTION

Connect



**Architecture serves
as a storyteller of our
collective journey.**

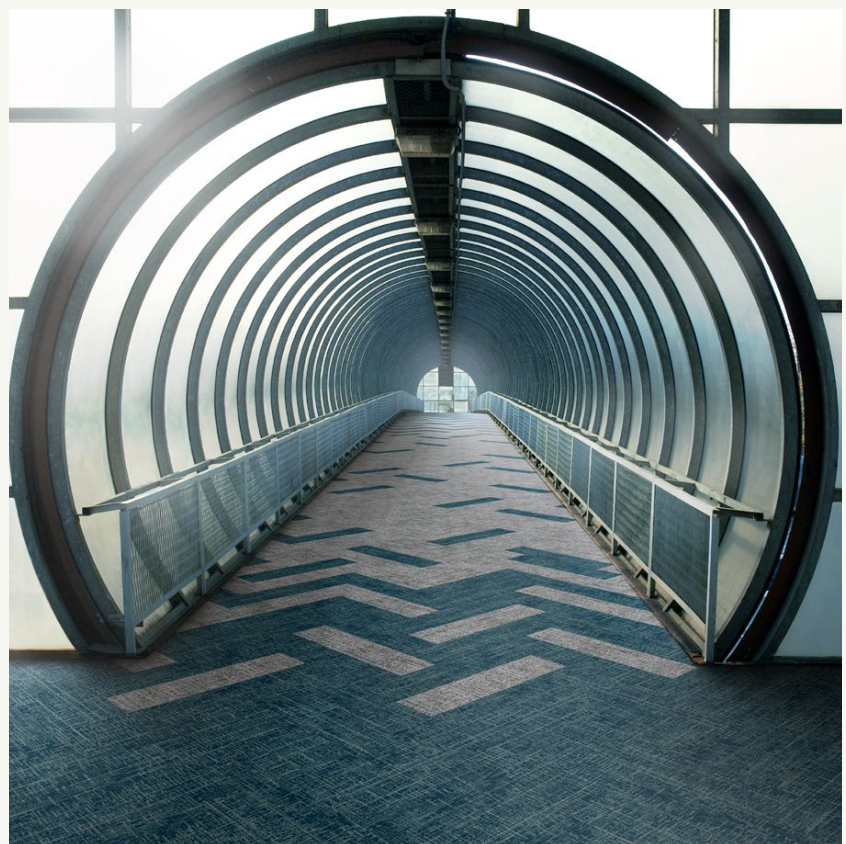



AC03 Bucharest
AC04 Shanghai
AC41 Jing'An



AC05 Bangkok
AC51 Silom



AC05 Bangkok
FL27 Yilan
FL38 Shiraki



AC06 Istanbul
AC61 Vefa

Architecture Connect

Architecture connects us to the past with a vision of the future.

Carpet Tile Specifications

CONSTRUCTION
PILE FIBER
TUFTING GAUGE
PILE HEIGHT
TOTAL CARPET WEIGHT
BACKING STRUCTURE
PILE TREATMENT
STANDARD MODULE SIZE

Performance

END USE CLASSIFICATION
CASTER CHAIR INDEX
DIMENSIONAL STABILITY
ELECTROSTATIC PROPENSITY
COLORFASTNESS TO LIGHT
INDOOR AIR QUALITY

Flammability


HOT METAL NUT
RADIANT PANEL TEST
SMOKE DENSITY
SURFACE FLAMMABILITY

Sound Absorption

NOISE REDUCTION COEFFICIENT


EcoSquare®

Multi-Level Loop Texture
100% Solution Dyed Nylon
1/12 inch
2.5 - 5.0 mm.
3,810 gram/sq.m.

 **EcoSquare®**
Reinforced Recycled Hard Back
Stain and Soil Protection
25 x 100 cm.

EcoSoft®

Multi-Level Loop Texture
100% Solution Dyed Nylon
1/12 inch
2.5 - 5.0 mm.
2,695 gram/sq.m.

 **EcoSoft®**
Recycled PET Cushion Back
Stain and Soil Protection
25 x 100 cm.




Certification




Specifications are subject to normal manufacturing tolerances, and subject to change without prior notice. As in all quality carpets, colors are subject to dye lot variations.

Installation Method

25 x 100 cm.



Random Vertical Brick



Herringbone



Sustainability Awards

Winner

Waste Elimination
Carpets Inter EcoSoft® carpet tiles

Headquarters

2054 New Petchburi Road
Bangkapi, Huaykwang, Bangkok 10310 Thailand
Tel +66 (0) 2314-5402, Fax +66 (0) 2318-3537
www.carpetsinter.com, info@carpetsinter.com

A brand of TCM Corporation Public Company Limited