


Near-Solid or Light Color Shade Textures


It is expected that the joint lines of solid and/or near-solid modular carpet tiles will be visible. This is not considered or accepted as a product defect, because it is due to the inherent characteristic of a geometric modular shape. It is the same as you will see in other modular flooring materials, such as wood planks, resilient (LVT) and/or hard floor (e.g.: Homogenous, ceramic, etc.,).

To support a satisfactory outcome to our client’s project, our website, sample folder and collection portfolio specifications will advise the recommended installation configurations for either a 50cm x 50cm Square and/or 25cm x 100cm Plank module.

The most popular configurations for 50cm x 50cm Square Modules are as shown here;

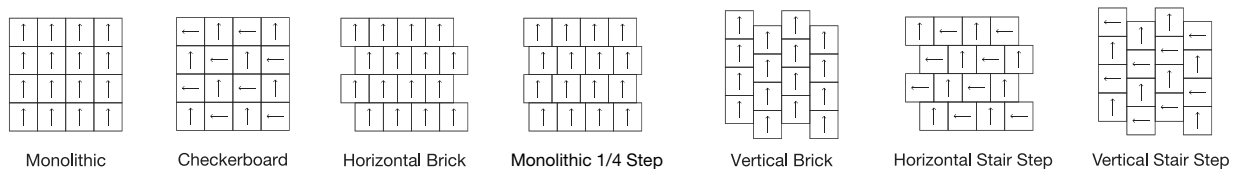

The most popular configurations for 25cm x 100cm Plank Modules are as shown here;

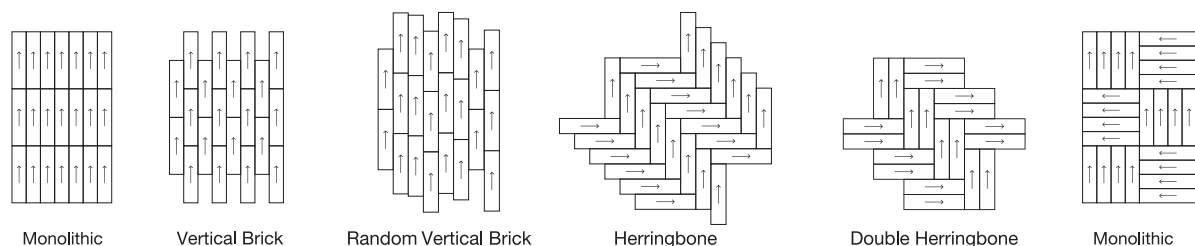

However, please refer to the individual Collection sample folder or Website specification for the manufacturers recommended configuration(s) that apply to each particular pattern to achieve the desired outcome.

Solid plain color modular tiles

For 50cm x 50cm Square solid color tile, we recommend a checkerboard installation. For 25cm x 100cm Plank solid color tile, we recommend a herringbone installation. These installations create a subtle texture on the floor by utilizing the visibility of the seams.

However, if you prefer a carpet tile that masks most joints, then it is recommended to select an alternative CI Collection that has a higher contrast of pattern, texture & color, which naturally disguises and will mitigate the visibility of modular tile joints in most applications.

Due diligence of Flooring Contractor

The information shared are “recommendations” only and the installation flooring contractor must always dry-lay an area of approximately 4 cartons (20m2) and obtain the approval and sign-off by the Interior designer and project manager, before proceeding with a permanent application. Irrespective, during installation the carpet installer must be responsible to observe any ‘bold’ patterning lines occurring where the same color (dark or light) of edge yarn creates a noticeable wider line at the butt-joint and relocate the adjacent module into another position.

For specific instructions or advice, please consult your local Carpets Inter representative Office.